


## DESCRIPTION

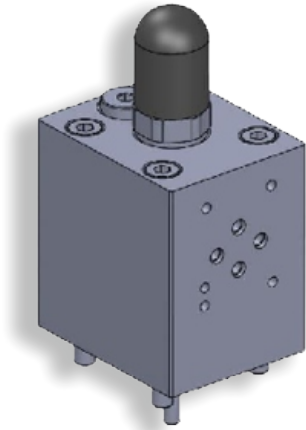

The Covers with Stroke limiter model CVC\*TS\* are designed to hold Hydronine make Cartridge valves model CV\*\*\* in cavities machined as per ISO 7368 , and provide facility to control the oil flow passing through these cartridges by electrical signal.

The flow passing through the cartridge is controlled by controlling the opening of the poppet by means of a Stroke limiter screw provided in the cover . The throttling is effective in either directions.


Clockwise rotation of the Stroke Throttle screw will decrease the flow passage , thereby decreasing the flow.

A check nut is provided to lock the Throttle Screw in its position.


A soft rubber cap prevents accidental damage to the Throttling Screw .

These Stroke limiters are more effective with cartridges having poppet with cushion nose.

## SECTION

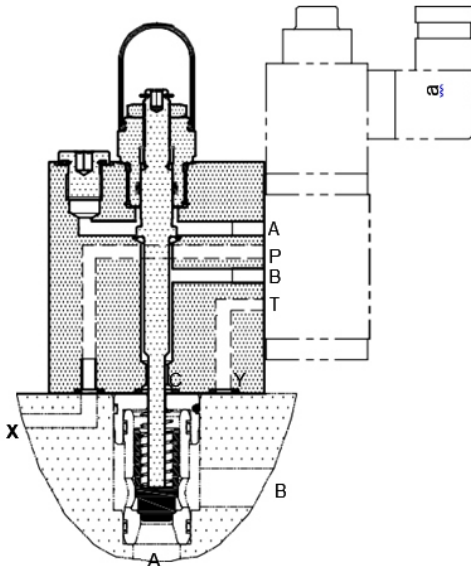

## HYDRAULIC SYMBOL

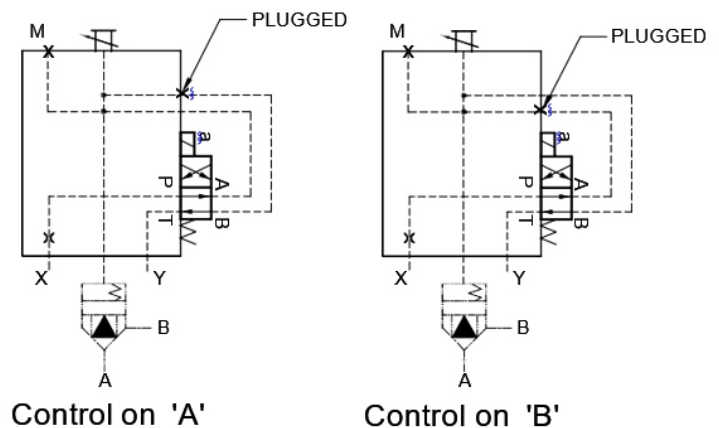

## TECHNICAL SPECIFICATIONS

Mounting interface	: As per ISO 7368
Working pressure	: 350 bar.
Hydraulic medium	: Mineral oil.
Temperature range	: -20°C to + 80°C.
Viscosity range	: 10 cSt to 380 cSt.
Fluid cleanliness required	: ISO 4406 20/18/15 or better.


UNIT DIMENSIONS

Dimensions in mm.





Notes:

- Cover fixing S.H.C Screws are **OUT OF SCOPE OF SUPPLY.**
- Mounting interface for Soln. D.C.V as per ISO 4401-03-02.

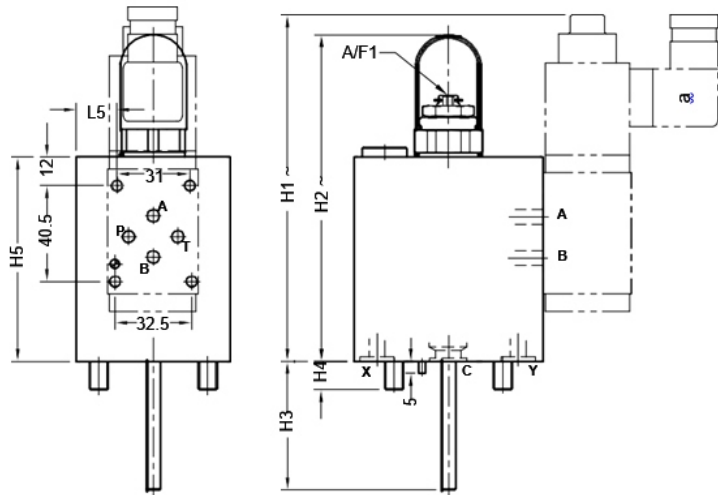


Cover mounting interface as per ISO 7368.

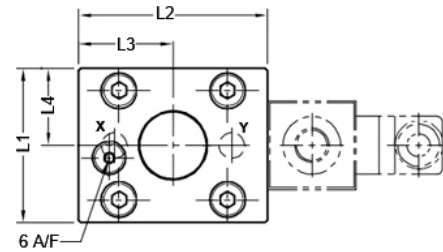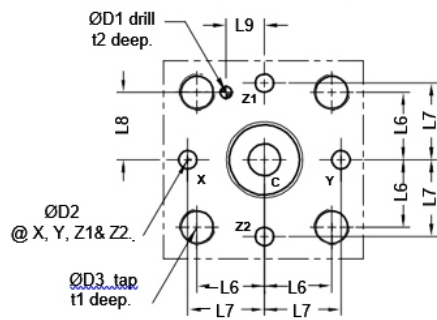

Size	Mas. Kg. appr.	L1	L2	L3	L4	L5	L6	L7	L8	L9	H1	H2	H3	H4	H5	ØD	ØD <sub>2</sub> max	ØD <sub>3</sub>	t1	t2	A/F	*M. 4 nos. Cover fixing S.H.C. Screw (Class 12.9)	Tightening Torque.
16	3.7	65	80	40	32.5	17	23	25	23	10.5	156	138	35.2	12	86	4	4	M8	14	10	4	M8 x 90 Long	39 Nm
25	5.3	85	85	42.5	42.5	26	29	33	29	16	160	145	53	18	90	6	6	M12	20	10	4	M12 x 100 Long	135 Nm
32	7.5	102	102	51	51	31.5	35	41	35	17	160	156	59	24	90	6	8	M16	26	10	8	M16 x 100 Long	330 Nm
40	11	125	125	62.5	62.5	37.5	42.5	50	42.5	23	160	156	66	30	90	6	10	M20	33	10	8	M20 x 100 Long	650 Nm

ORDERING COAD

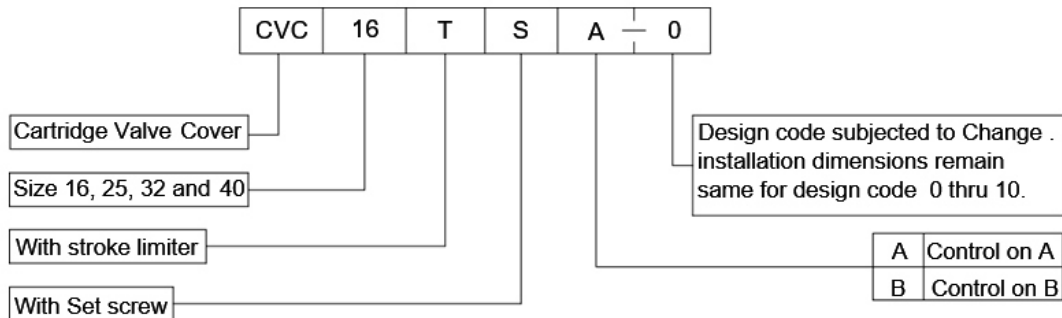

Notes: Solenoid (refer spool type) to be ordered separately.

